

Specification/standard

规范 / 标准

Specification	IEC 61984
规范	IEC 60664-1
Authentication	IEC 61373
认证	


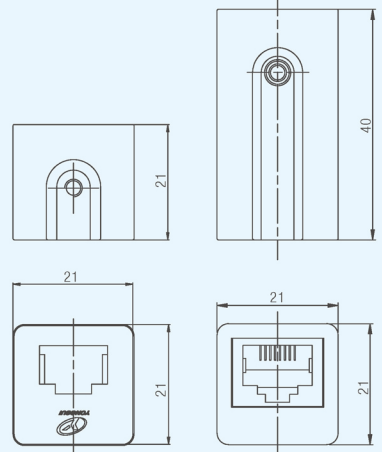

Insert 插芯

芯数	8
Number of contacts	
额定电压	50V
Rated voltage	
额定电流	1A
Rated current	
绝缘电阻	$\geq 10^{10}\Omega$
Insulation resistance	
额定脉冲电压	0.8kV
Rated impulse voltage	
机械寿命	≥ 500 次
Mechanical life	
环境温度	-40°C ~ +85°C
Ambient temperature	
导线规格	网线
Wire gauge	Network cable
阻燃等级	EN45545-2:R22/R23 UL94-V0
Flame retardant grade	
绝缘体材料	阻燃 PC
Insulator material	Flame retardant PC

针数量 Number of contacts

8 +

 Shell size: matching 3A/3B shell
 外壳尺寸: 匹配 3A/3B 外壳

Description 描述	Specification 型号	Order number 订货号		比例图 Scale drawings	尺寸单位 (mm) Dimension unit
		公插芯 Male	母插芯 Female		
冷压连接 冷压针 Crimp terminal, crimp contacts 需单独订购 need to be ordered separately 	HDC-HQRJ45-M HDC-HQRJ45-F	114060101900	113060200358		Crystal head 装水晶头
Description 描述	Type 型号	Wire gauge 压线规格		remarks 备注	
单用网络端子钳 Single use network terminal clamp 	BS431108(8P)	网线 Network cable			